ROTATING CANTILEVER UMBRELLA













Patented & Trademarked Technology



SHADOWLIFT™ Gas-assisted deployment for an easy lift.



SHADOWGLIDE™ Engineered to open or close in 5 seconds.



SHADOWHUB™ LED light technology built-in and app controlled.



SHADOWLOCK™ Integrated security and wind-protection.

Fabric Warranty* BEST-IN-CLASS

Canopy

Stock Colours



Oyster



Alpine Stone



Charcoal Tweed



Black





Solution Dyed Acrylic

Some fabric dying methods only coat the outer surface of the fibre - think of a radish.

With the Solution Dyed method, each individual thread fibre is dyed - think of a beetroot. The fabric is also easy to clean and covered by a 10 year warranty.

Frame Colour



Space Grey







Mildew Resistant























Size & Configuration

Features

Accessories

N.b. Accessories are optional. Pricing additional.






SQUARE

3.0m




OCTAGON

3.5m



OCTAGON

4.0m



All sizings and conversions are approximate and subject to change without notice. Refer to specsheets for exact, up-to-date measurements.




EASY OPEN & CLOSE

Umbrella deployment system with no winding or cables.



MARINE GRADE

No-rust, 316 Stainless Steel Spigot.



FOLLOW THE SUN

Enjoy the 360° rotation for all-day-shade.



LED LIGHT CONTROL

Power your light with the Smart Battery or Hardwire Kit.



PROTECTION COVER

Recommended, optional care and protection for your umbrella.



CASTOR WHEELS FOR FREE-STANDING BASE

Mounting Options

SURFACE PLATE

For deck, patio and concrete mounting. (316 stainless steel)



WALL MOUNT BRACKET

For when ground mounting isn't possible. (316 stainless steel)



FREE-STANDING BASE + ALUMINIUM BASE COVER

For complete customised manoeuvrability.



Available in Space Grey.

Concrete pavers (not included) are required for ballast. Optional Castor Wheels available.

Dimensions

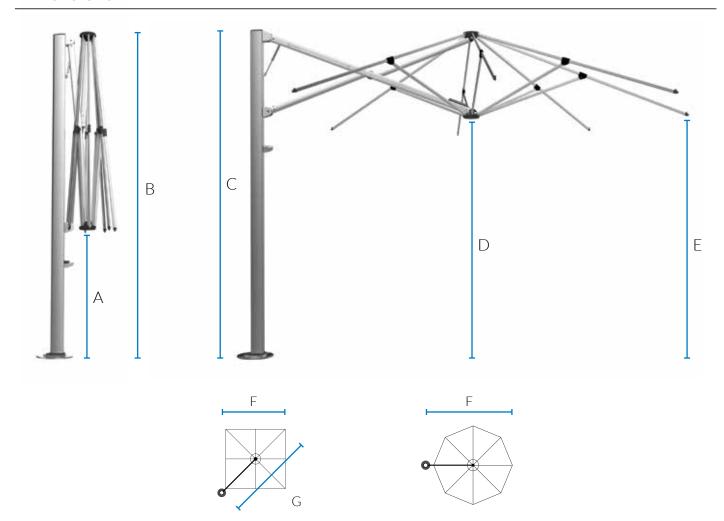


Diagram Legend

- A Ground to central frame hub when closed +
- **B** Total height to top of canopy+
- C Height of umbrella to top of mast cap+
- **D** Ground to central frame hub when open †
- E Ground to lower outer edge of canopy+
- F Centre of Spigot to outside edge of canopy
- **G** Diagonal from centre of mast to corner

2.5m	3.0m	3.5m	4.0m
860mm	620mm	1079mm	866mm
2900mm	2824mm	2975mm	2899mm
2908mm	2908mm	2908mm	2908mm
2130mm	2054mm	2205mm	2128mm
2222mm	2219mm	2237mm	2172mm
2646mm	2973mm	3447mm	3923mm
3742mm	4205mm	N/A	N/A

+Free-standing Base installations will add 165mm to the height and surface plates will add 12mm to the height. Adding the optional Castor Wheels to the Free-standing Base will increase height a further 45-80mm to the height. All sizings and conversions are approximate and subject to change without notice. Refer to specsheets for exact, up-to-date measurements.

